Features Lapa T7.10

• Modern Deck-Mounted Bathroom Faucet

- Single handle lever controls water flow and temperature
- Brushed Stainless Steel Finish (AISI 304)
- Requires Single-Hole Installation
- Includes Ceramic Disc Cartridge
- Flow Rate: 1.5 GPMSpout Reach: 3.7"




## **Finishes**




**Brushed Stainless Steel** 

C	0	1	1	е	С	t	i	0	n
La	pa	a							

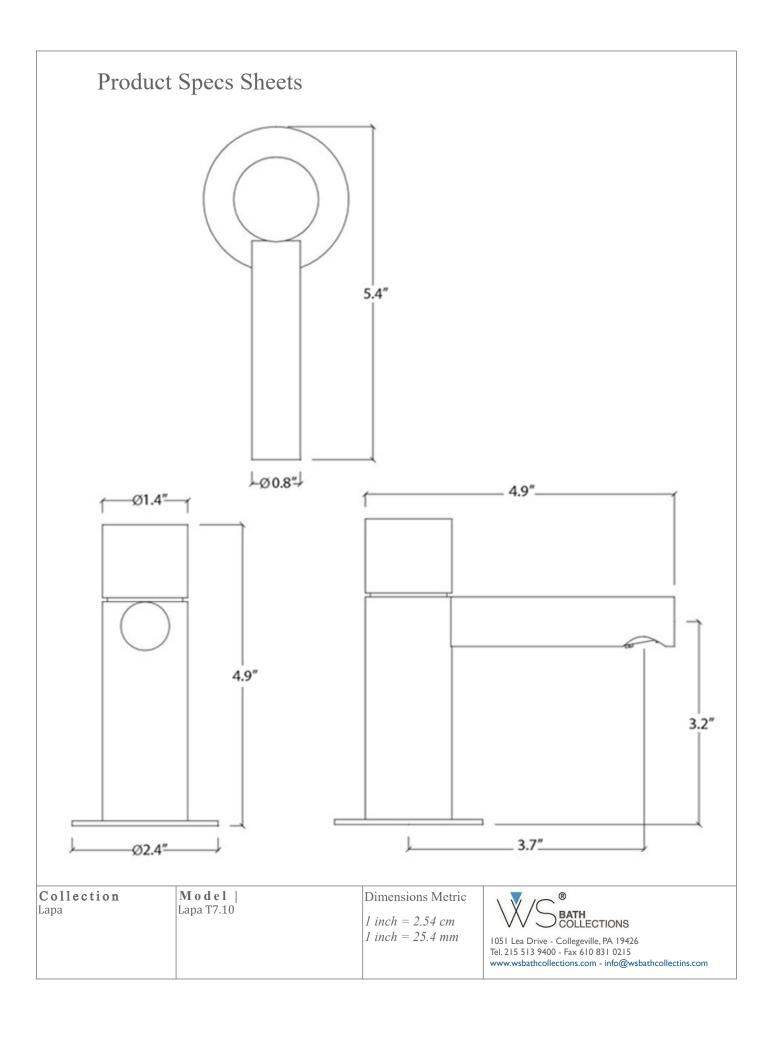

# **Product Specs Sheets**

## **ASSEMBLY INSTRUCTIONS**

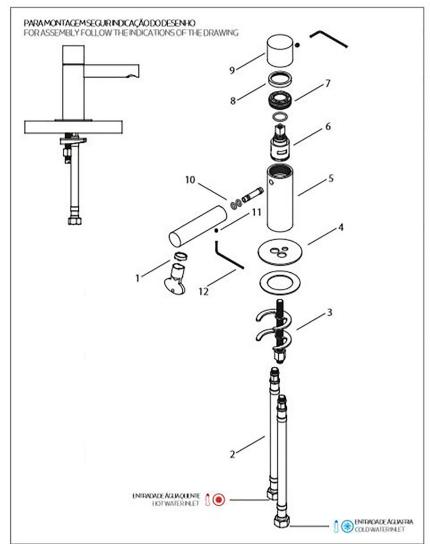

	TECHNIC	CAL DATA				
Nº	REFERENCE	DESCRIPTION				
01		AERATOR				
02		FLEXIBLE CONNECTION				
03		FIXING KIT				
04		PLATE				
05		TAP BODY				
06		CARTRIDGE				
07		LOCKNUT				
08		CARTRIDGES CONCEALER				
09		HANDLE				
10		SPOUT				
11		UMBRAK SCREW				
12		UMBRAK KEY				

### INSTALLATION RECOMENDATIONS

Before installing a tap, it is good to rinse the supply pipes to remove all residues. We also recommend installing the taps with a fitter. The installation of the tap must be done with the surface clean and dry. to perform the water pressure test, the taps must be open.

#### CLEANING AND MAINTENANCE

Cleaning must be done with liquid soap and water. Do not use liquid detergents containing abrasive or acidic substances, abrasive sponges or disinfectants. Incorrect cleaning may permanently ruin the surface of taps.

On color finishings, do not use products containing alcohol, acetone and other solvents.

C	0	11	е	С	t	i	0	n
La	p	a						