Features Flow T1.50

- Modern Kitchen Faucet with Swivel Spout
- Single handle lever controls water flow and temperature
- Polished Chrome Finish
- Made of Lead-Free Solid Brass
- Swivel Spout allows for greater sink access
- Requires Single-Hole Installation
- Includes Ceramic Disc Cartridge
- Flow Rate: 1.5 GPMSpout Reach: 7.0"




Finishes





Polished Chrome

C	0	1	1	е	С	t	i	0	n
Fl	OV	V							

Product Specs Sheets

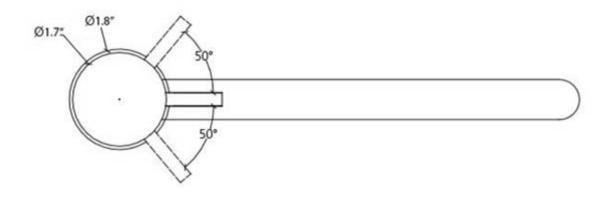

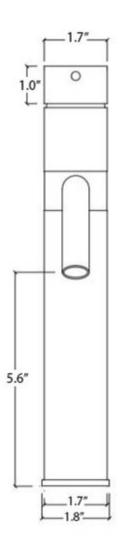

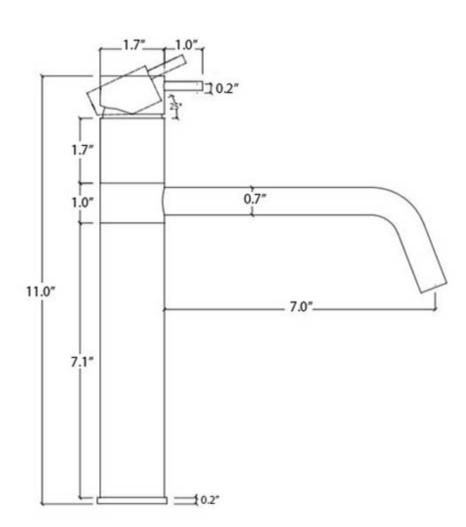

Collection Flow Model | Flow T1.50 Dimensions Metric


1 inch = 2.54 cm 1 inch = 25.4 mm



1051 Lea Drive - Collegeville, PA 19426 Tel. 215 513 9400 - Fax 610 831 0215 www.wsbathcollections.com - info@wsbathcollectins.com

Product Specs Sheets

ASSEMBLY INSTRUCTIONS

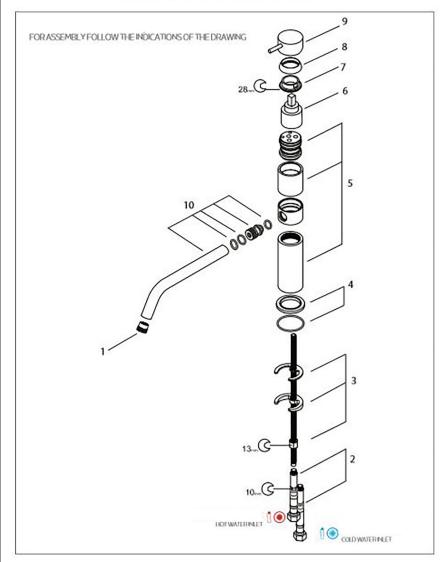

	TECHNICAL DATA
Νº	DESCRIPTION
01	AERATOR
02	CONNECTION FLEXIBLE
03	FIXING KIT
04	PLATE
05	TAP BODY
06	CARTRIGE
07	LOCKNUT
80	CARTRIDGES CONCEALER
09	HANDLE
10	SPOUT

INSTALLATION RECOMENDATIONS

Before installing a tap, it is good to rinse the supply pipes to remove all residues. We also recommend installing the taps with a filter. The installation of the tap must be done with the surface clean and dry. to perform the water pressure test, the taps must be open.

CLEANING AND MAINTENANCE

Cleaning must be done with liquid soap and water. Do not use liquid detergents containing abrasive or acidic substances, abrasive sponges or disinfectants. Incorrect cleaning may permanently ruin the surface of taps.

On color finishings, do not use products containing alcohol, acetone and other solvents.

C	0	1	1	е	С	t	i	0	n
Flo	ΟV	V							